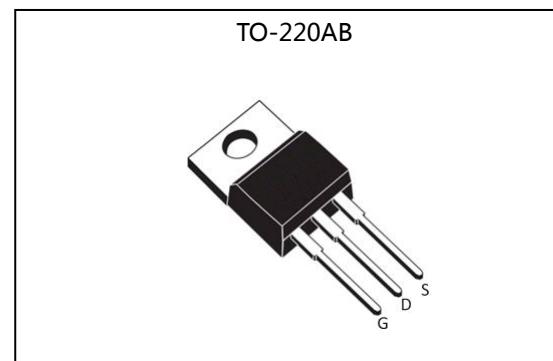



Silicon N-Channel Power MOSFET
General Description :

HMB40N30, the silicon N-channel Enhanced VDMOSFET, is obtained by the self-aligned planar Technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor can be used in various power switching circuit for system miniaturization and higher efficiency. The package form is TO-220AB, which accords with the RoHS standard.

V_{DSS}	300	V
I_D	40	A
$P_D(T_C=25^\circ\text{C})$	340	W
$R_{DS(\text{ON})\text{TYP.}}$	75	$\text{m}\Omega$


Features :

- Fast Switching
- Low ON Resistance
- Low Gate Charge
- Low Reverse transfer capacitances
- 100% Single Pulse avalanche energy Test

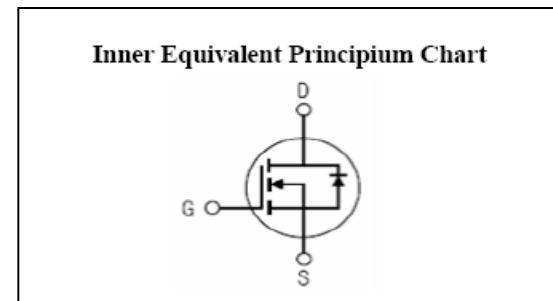
Applications:

- Power switch circuit of adaptor and charger

Absolute ($T_C=25^\circ\text{C}$ unless otherwise specified) :

Symbol	Parameter	Rating	Units
V_{DSS}	Drain-to-Source Voltage	300	V
I_D	Continuous Drain Current	40	A
	Continuous Drain Current $T_C=100^\circ\text{C}$	28	A
I_{DM}^{a1}	Pulsed Drain Current	160	A
V_{GS}	Gate-to-Source Voltage	± 30	V
E_{As}^{a2}	Single Pulse Avalanche Energy	1200	mJ
E_{Ar}^{a1}	Avalanche Energy ,Repetitive	100	mJ
I_{AR}^{a1}	Avalanche Current	6.5	A
dv/dt^{a3}	Peak Diode Recovery dv/dt	5.0	V/ns
P_D	Power Dissipation	340	W
	Derating Factor above 25°C	2.72	$\text{W}/^\circ\text{C}$
T_J, T_{stg}	Operating Junction and Storage Temperature Range	150, -55 to 150	$^\circ\text{C}$
T_L	Maximum Temperature for Soldering	300	$^\circ\text{C}$

Caution Stresses greater than those in the "Absolute Maximum Ratings" may cause permanent damage to the device

Thermal Characteristics

Symbol	Parameter	Rating	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	0.37	°C / W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	62	°C / W

Electrical Characteristics ($T_c = 25^\circ C$ unless otherwise specified) :

OFF Characteristics						Units	
Symbol	Parameter	Test Conditions	Rating				
			Min.	Typ.	Max.		
V_{DSS}	Drain to Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	300	--	--	V	
$\Delta V_{DSS}/\Delta T_J$	Bvdss Temperature Coefficient	$I_D=250\mu A$, Reference $25^\circ C$	--	0.2	--	$V/^\circ C$	
I_{DSS}	Drain to Source Leakage Current	$V_{DS}=300V, V_{GS}=0V, T_a=25^\circ C$	--	--	1.0	μA	
		$V_{DS}=240V, V_{GS}=0V, T_a=125^\circ C$	--	--	100		
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS}=+30V$	--	--	100	nA	
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS}=-30V$	--	--	-100	nA	

ON Characteristics						Units	
Symbol	Parameter	Test Conditions	Rating				
			Min.	Typ.	Max.		
$R_{DS(ON)}$	Drain-to-Source On-Resistance	$V_{GS}=10V, I_D=20A$	--	75	90	$m\Omega$	
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	--	4.0	V	
g_{fs}	Forward Trans conductance	$V_{DS}=15V, I_D=20A$	--	25	--	S	

Pulse width < 380μs; duty cycle < 2%.

Dynamic Characteristics						Units	
Symbol	Parameter	Test Conditions	Rating				
			Min.	Typ.	Max.		
C_{iss}	Input Capacitance	$V_{GS}=0V, V_{DS}=25V$ $f=1.0MHz$	--	3100	--	pF	
C_{oss}	Output Capacitance		--	320	--		
C_{rss}	Reverse Transfer Capacitance		--	45	--		

Resistive Switching Characteristics						Units	
Symbol	Parameter	Test Conditions	Rating				
			Min.	Typ.	Max.		
$t_{d(ON)}$	Turn-on Delay Time	$I_D=40A, V_{DD}=150V$ $V_{GS}=10V, R_g=12\Omega$	--	35	--	ns	
t_r	Rise Time		--	82	--		
$t_{d(OFF)}$	Turn-Off Delay Time		--	180	--		
t_f	Fall Time		--	90	--		
Q_g	Total Gate Charge	$I_D=40A, V_{DD}=150V$ $V_{GS}=10V$	--	65	--	nC	
Q_{gs}	Gate to Source Charge		--	15	--		
Q_{gd}	Gate to Drain ("Miller")Charge		--	35	--		

Source-Drain Diode Characteristics

Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
I_{SD}	Continuous Source Current (Body Diode)		--	--	40	A
I_{SM}	Maximum Pulsed Current (Body Diode)		--	--	160	A
V_{SD}	Diode Forward Voltage	$I_S=40A, V_{GS}=0V$	--	--	1.5	V
t_{rr}	Reverse Recovery Time	$I_S=40A, T_j=25^\circ C$	--	400	--	ns
Q_{rr}	Reverse Recovery Charge	$dI_F/dt=100A/\mu s, V_{GS}=0V$	--	3.4	--	μC

a1 : Repetitive rating; pulse width limited by maximum junction temperature

a2 : $L=10mH, I_D=15.5A, \text{Start } T_J=25^\circ C$

a3 : $I_{SD}=40A, dI/dt \leq 200A/\mu s, V_{DD} \leq BV_{DS}, \text{Start } T_J=25^\circ C$

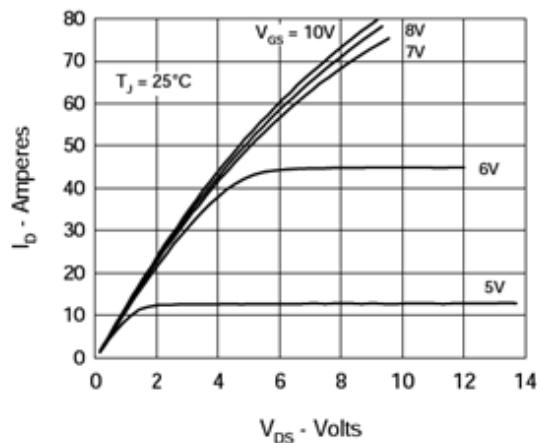
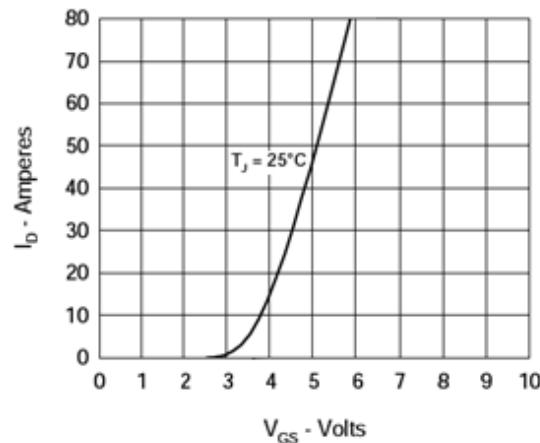
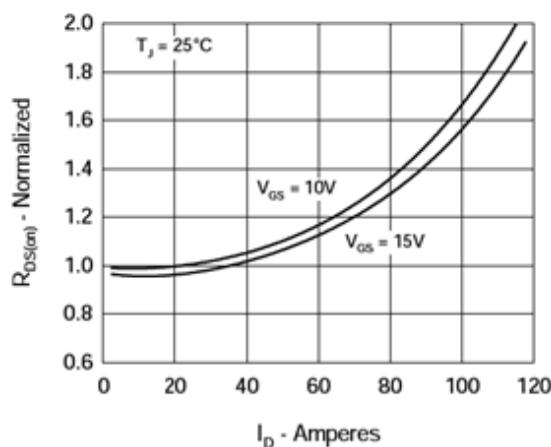
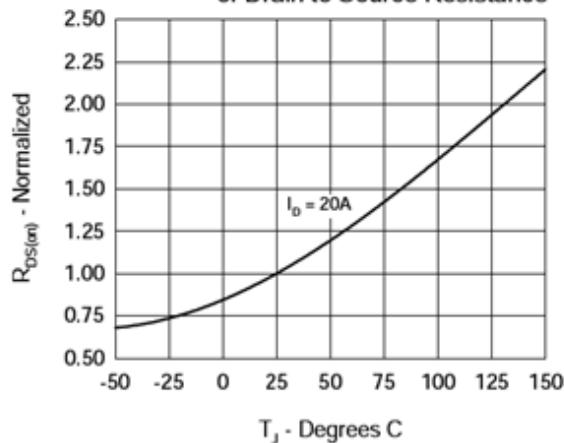
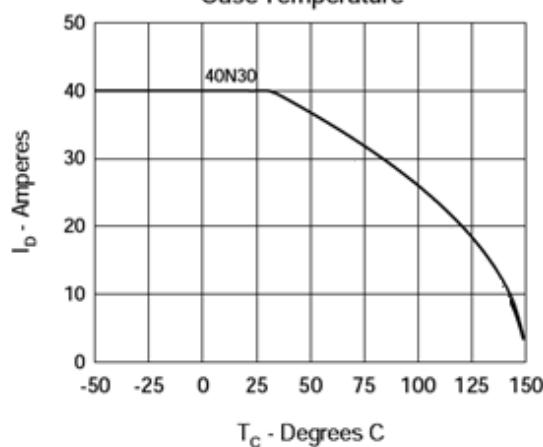
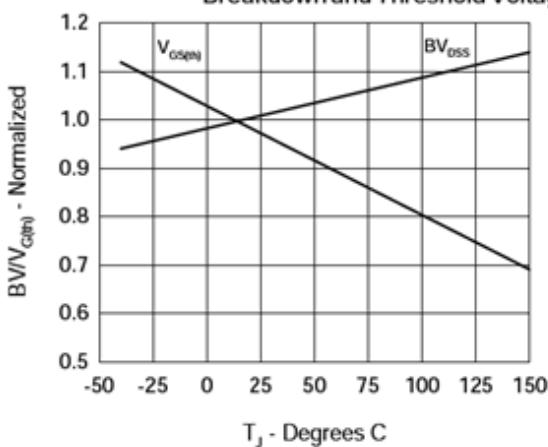
Characteristics Curve :
Fig. 1 Output Characteristics

Fig. 2 Input Admittance

Fig. 3 $R_{DS(on)}$ vs. Drain Current

Fig. 4 Temperature Dependence of Drain to Source Resistance

Fig. 5 Drain Current vs. Case Temperature

Fig. 6 Temperature Dependence of Breakdown and Threshold Voltage


Fig.7 Gate Charge Characteristic Curve

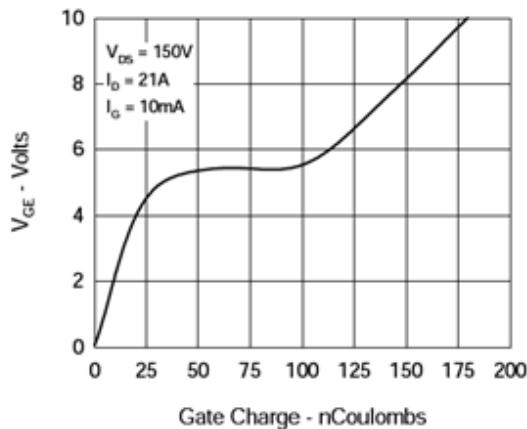


Fig.8 Forward Bias Safe Operating Area

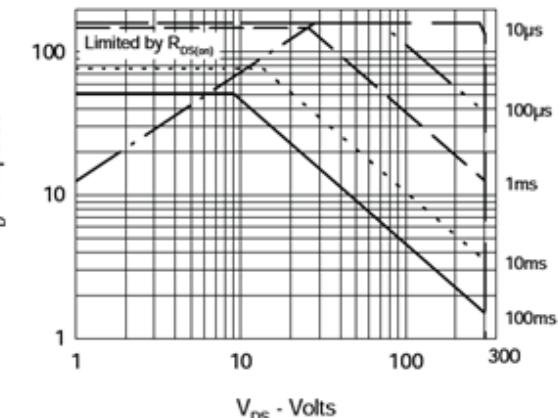


Fig.9 Capacitance Curves

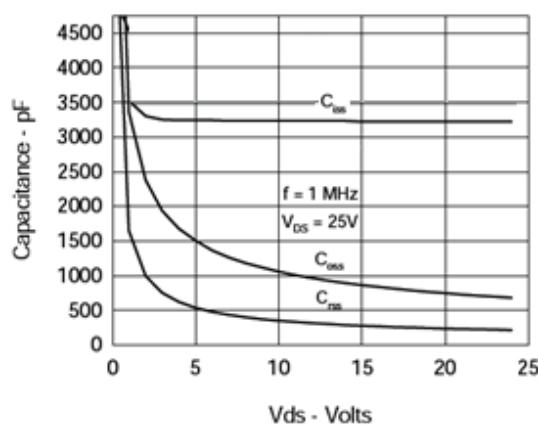


Fig.10 Source Current vs. Source to Drain Voltage

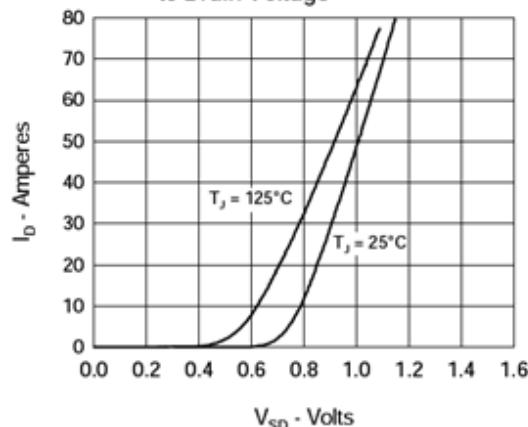


Fig.11 Transient Thermal Impedance

