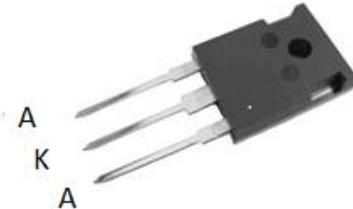
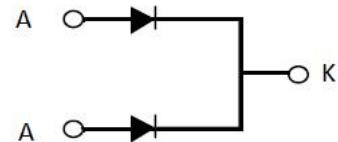


SCHOTTKY RECTIFIERS**Features:**

- High ESD capacity
- High reliability
- High frequency operation
- Low forward voltage
- High surge capacity

**Applications:**

- Switching mode power supply
- High frequency inverter circuit
- Polarity protection circuit



Product Summary	
V _R	60 V
I _{F(AV)}	2*15A
T _j	150°C
V _{F(max.)}	0.75V

Absolute Maximum Ratings

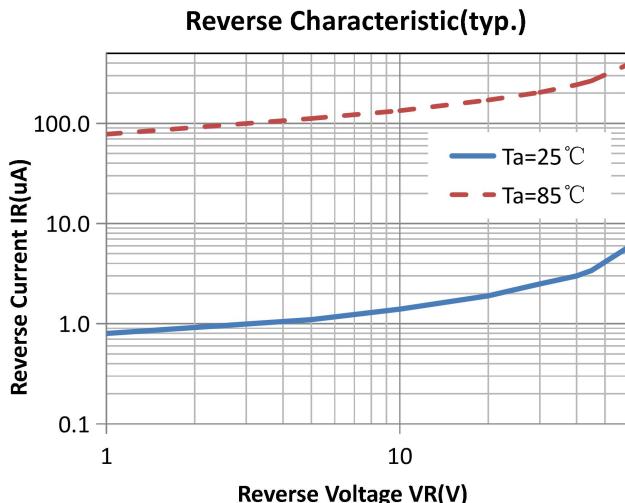
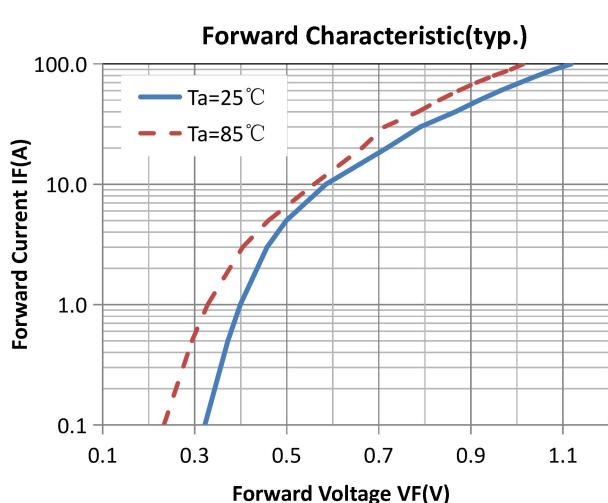
Parameter	Symbol	Values	Units
Repetitive peak reverse voltage	V _{RRM}	60	V
Continuous forward current	I _{F(AV)}	30	A
Single pulse forward current	I _{FSM}	300	
Operating junction	T _j	150	°C
Storage temperatures	T _{stg}	-55 to +150	°C
Peak Repetitive Reverse Surge Current	I _{RRM}	5	A

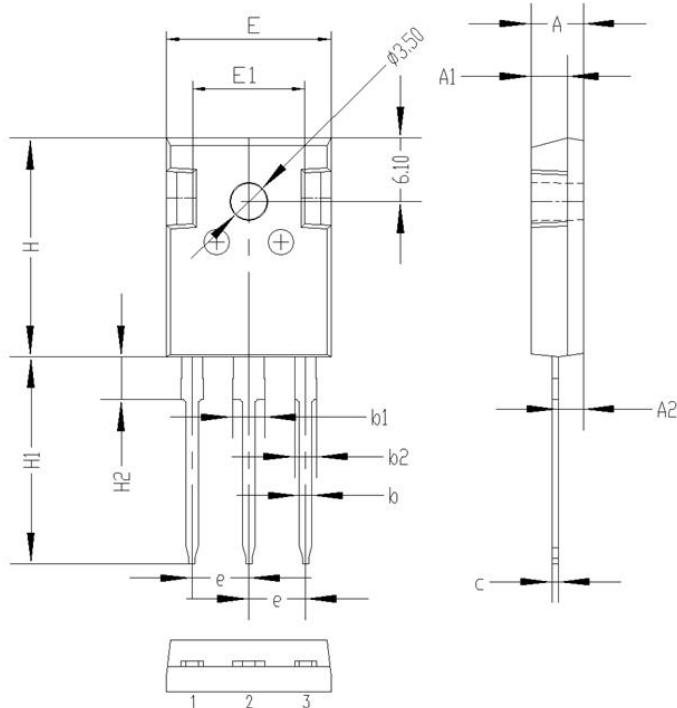
Electrical characteristics (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ.	Max.	Units
Breakdown voltage Blocking voltage	V _{BR} , V _R	I _R =100μA	60			V
Forward voltage (Per Diode)	V _F	I _F =15 A		0.65	0.75	
		I _F =15 A, T _j =85°C		0.60	0.70	
Reverse leakage current(Per Diode)	I _R	V _R =V _{RRM}			120	μA
		T _j =85°C, V _R =60V			30	mA

Thermal characteristics

Parameter	Symbol	Typ.	Units
Junction-to-Case	R _{θJC}	0.8	°C/W

Electrical performance (typic)


Package Information**TO-247 PACKAGE**

Symbol	Dimensions(millimeters)	
	Min.	Max.
A	4.80	5.20
A1	3.30	3.70
A2	2.10	2.50
b	1.00	1.40
b1	2.90	3.30
b2	1.90	2.30
c	0.40	0.80
e	5.25	5.65
E	15.6	16.0
E1	10.6	11.00
H	20.8	21.2
H1	19.4	20.4
H2	3.90	4.30
G	5.90	6.30
ΦP	3.30	3.70